

Date:	
Type:	
Firm Name:	
Project:	



# C-SPT-DF4 DMX Splitter

Everylite Datasheet Ver 3.0.0  
Revision Date 08/2022



## Features


- 1 DMX input, 4 DMX outputs, the input is fully isolated from the outputs.
- It allows the user more flexibility in connecting DMX controlled devices.
- Controls up to 512 channels.
- LED indicators show Power (Red LED) and DMX Input (Green LED).
- Power supply is permanently attached: 100-240VAC, 50-60Hz, 0.5 Amps, autoswitching.
- Phoenix terminal blocks for easy wiring.
- Exterior of 0.1" thick aluminum with 1/2" hole for use with a C-Clamp or half coupler.
- Convection cooling, no fan required.



## Technical Parameters

Input Power	Max. Current	Output Type	Input Type	Max. Output Channels
100-240 VAC	0.5A	DMX512	DMX512	1 Universe (512 CH)
Protocols	Temperature	Connectors	DMX Connector Pin Out	Dimensions (L x W x H)
DMX512-1990 DMX512-A RDM	32-104 °F 10-90% Humidity (non-condensing)	1 x 3 Wire DMX Input 4 x 3 Wire DMX Output	Pin 1: GND Pin 2: DATA- Pin 3: DATA+	(4.8 x 5.5 x 1.6) in

## Wiring Diagram

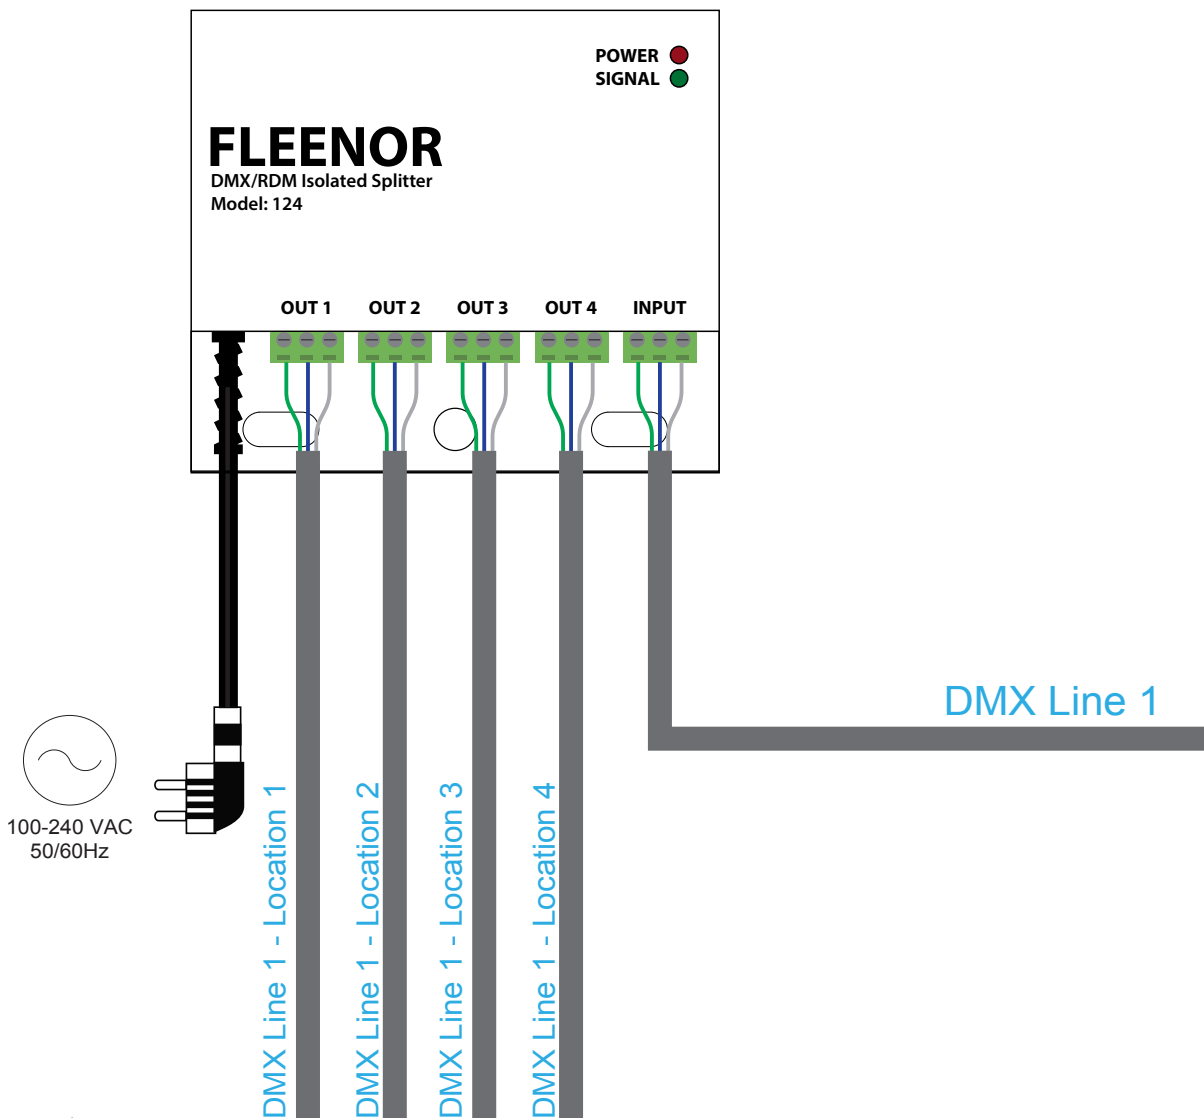

 Drawing

