


Date:	
Type:	
Firm Name:	
Project:	



Strip Light

Slim 4 Series

Everylite Datasheet Ver 2.2
Revision Date 07/2020

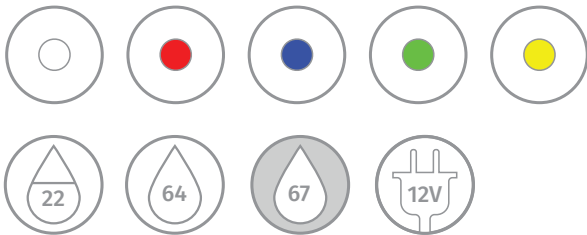

Features

- Available in White
- Commonly used in architectural, sign letter, perimeter and many other lighting applications
- Low profile linear smooth light
- Different Waterproofing options
- Min. cutting length 1 inch

2835V12-XX120ZZZ-SM4

Product Line
2835

Voltage
12

IP Rating
IN, SS, OD

LED Pcs/Meter
120

Color
White, Red, Blue,
Green, Yellow




Series
Slim 4



Slim 4 Technical Parameters

Item #	LED Qty. (LED/m)	LED Qty (LED/ft)	Cutting Length	Max. Run Length (Single Feed)	Roll Length	Viewing Angle	Input Voltage	Wattage (W/ft)	Certifications	Working Temperature	IP Rating Availability
2835V12-XX120ZZZ-SM4	120	36	1"	3.28'	16.4'	120	12V	2.93	UL	-104~176 °F	22, 64, 67

* XX = IP Rating, ZZZ = Color Temperature

IP Rating	Order Code	Description
IP22	IN	 Non-Waterproof
IP64	SS	 Spray Glue Coated
IP67	OD	 Tube Waterproof

Color Temperature	Order Code	Lumen Output (lm/ft)
2500	W25	225
2700	W27	208
3000	W3	214
3500	W35	214
4000	W4	217
5000	W5	228
5700	W57	231
6500	W6	246
9000	W9	226
Red	RR	114.63
Green	GG	335.37
Blue	BB	87.8
Yellow	YY	102.44

Notes

- ① Testing environment temperature: 25±2°C [77±3.6°F];
- ② The above data are typical values; the actual data of each single product could differ from the typical values. The data subject to change without prior notice.
- ③ The above color temperature is the color temperature of LED. The color temperature of actual products subject to that of sample.

Drawing

Unit: inches

