

Date:	
Type:	
Firm Name:	
Project:	



Strip Light

Slim 5 Series


Everylite Datasheet Ver 2.2
Revision Date 07/2020



Features

- Available in White, Red, Blue, Green and Yellow
- Commonly used in architectural, sign letter, perimeter and many other lighting applications
- Low profile linear smooth light
- Different Waterproofing options
- Min. cutting length 2 inches

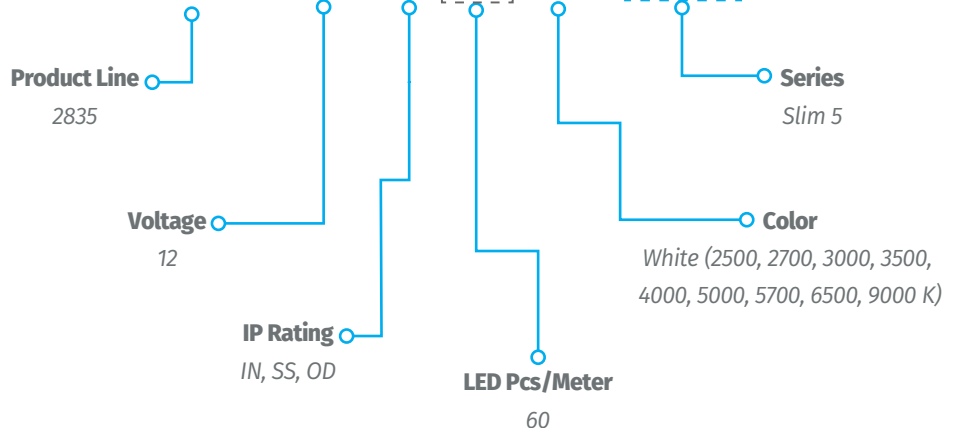


2835V12-XX60ZZZ-SM5



Slim 5 Technical Parameters

Item #	LED Qty. (LED/m)	LED Qty. (LED/ft)	Cutting Length	Max. Run Length (single feed)	Roll Length	Viewing Angle	Input Voltage	Wattage (W/ft)	Certifications	Working Temperature	IP Rating Availability
2835V12-XX60ZZZ-SM5	60	18	1.97"	9.84'	16.4'	120	12V	1.46	UL	-77~140 °F	22, 64, 67

* XX = IP Rating, ZZZ = Color Temperature

IP Rating	Order Code	Description
IP22	IN	 Non-Waterproof
IP64	SS	 Spray Glue Coated
IP67	OD	 Tube Waterproof

Color Temperature	Order Code	Lumen Output (lm/ft)
2500	W25	112
2700	W27	104
3000	W3	107
3500	W35	107
4000	W4	108
5000	W5	114
5700	W57	115
6500	W6	122
9000	W9	112

Notes

- ① Testing environment temperature: 25±2°C [77±3.6°F];
- ② The above data are typical values; the actual data of each single product could differ from the typical values. The data subject to change without prior notice.
- ③ The above color temperature is the color temperature of LED. The color temperature of actual products subject to that of sample.

Drawing

Unit: inches

